



CLASSICAL & GRACEFUL

IFE BUILDINGEYE-JO,BUILDINGEYE-ME

BUILDINGEYE-JO,BUILDINGEYE-ME IFE
BUILDINGEYE-JO,BUILDINGEYE-ME

BUILDINGEYE-JO, BUILDINGEYE-ME,embodies the simpleness and elegance by its beautiful shape, inner decoration,and fashionable design. Whenever you ride it , you will see that the ceiling and the floor maps each other, metal car door matches transparent glass which reflects modern atmosphere.
BUILDINGEYE-JO,BUILDINGEYE-ME panoramic elevator interpreter IFE on the building function and aesthetics to grasp vividly rendered, so that BUILDINGEYE -JO, BUILDINGEYE-ME in the construction both inside and outside with a wealth of appeal.



market



hotel



scenic spot

DOMESTIC REPRESENTATIVE CASES

IFE

IFE

IFE

IFE

Every project is significant footprint of IFE history, there are over ten thousand project have witnessed the great contribution of the IFE's products. IFE will keep going to contribute our effort to provide the best transportation equipment to the world.



AAAA

Shijiazhuang Cloud Dream Mountain AAAA Scenic Spot Sightseeing Ladder



Changsha Gaoqiao Market Develop CO.,LTD.



Huizhou Panda Real Estate



Hotel Good View Sangem Dongguan



Dongguan Yinli Golf Club



Tianjin Academy of Social Sciences



Heyuan Huada Group Landed Estate CO.,LTD.




Nanchang Imperial Kairui Hotel



Nanchang Civil Industrial Co., LTD.



Chongqing Tianma Real Estate Development CO.,LTD.

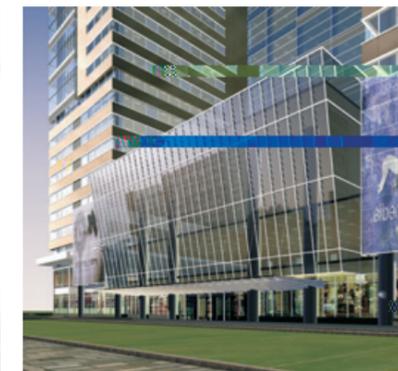

Shenzhen Baoan Zhonglv Hotel



Shenzhen Jiale Yuan Home Decorate CO.,LTD.



Shenzhen Dongfang Yadian International Business Hotel



Dongguan Zhengyu Property CO.,LTD.



Zhuzhou Shunyi Real Estate Development CO.,LTD.

FOREIGN REPRESENTATIVE CASES




ORIENTAL PLAZA
South Africa



MASHARY
Kuwait MASHARY MALL



Existing Village Hotel Albert Court

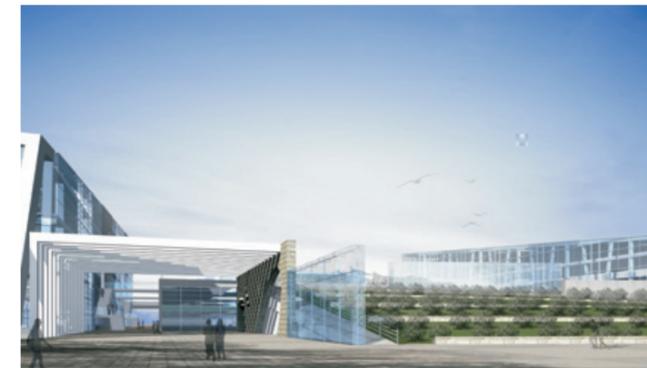

AL JURF
COMMERCIAL BUILDING AT AL JURF, AJMAN. UAE



CILEUNGSI
Indonesia METROPOLITAN MALL CILEUNGSI



Sha-Ali
Bangladesh Sha-Ali Shopping



MISHREFLN-4124
Kuwait LN-4124 NATIONAL SECURITY BUREAU AT MISHREF



Bahrain Greenland Danga Bay

SAFETY GUARANTEE , TECHNOLOGY SUPPORTING

UCMP

ZL201320606488.3

UCMP for Preventing Unintended Car Movement

Patent No. 201320606488.3

Unintended Car Movement Protection system(UCMP) prevents car unintended movement in the door opening area, prevents the risk of accidental movement of the car, and protects the safety of the passengers.

ZL201420470694.0

Anti-loosen Detection of Steel Rope for Protecting Riding Safety

Patent No. 201420470694.0

Whole-process real-time detected by anti-loosen detection of steel rope device. The elevator stops running immediately ensuring passengers safety if steel rope loose.

ZL201410337015.7

Alarmed for Overloading Alert by Precisely Weighing Technology

Patent No. 201410337015.7

Accurately measure car load at each landing floor by using the industry-leading weighing technology to avoid potential safety hazard and accidental injuries caused by overloading.

ZL201621450975.5

New Electrical Design Door Lock for Preventing Risk of Door Lock Short-circuited

Patent No. 201621450975.5

Prevent electrical circuit of elevator door lock and switch contact of door lock being man-made short circuit cause elevator to operate in the door opening condition, thus avoiding the risk of accident.





PEOPLE-ORIENTED, CREATIVE AND UNIQUE

EMC

EMC

Authoritative CE certification, EMC Standard

Product is CE-approved and complies with EMC and environmental standards, giving passengers safety protection by low radiation without electromagnetic pollution.

BUILDINGEYE

Design of unique Waterproof structure of Outdoor sightseeing ladder (optional)

BUILDINGEYE series sightseeing elevator is original, outdoor sightseeing elevator adopts unique waterproof structure design, car does not enter water, leakage, calmly cope with a variety of complex weather, adapt to a variety of complex operating environment, the quality is as good as one.

IFE

Outdoor sightseeing ladder equipped with accompanying cable windproof control system (optional)

IFE can be equipped with wind-proof control system for outdoor sightseeing elevator cable. the cable operates with the car up and down without the influence of wind, the car does not shake, does not fear any harsh open-air environment, and it is safer to travel.

High-strength tempered glass, breaking and not falling off

Sightseeing sedan chair wall and door, layer door are high strength toughened adhesive glass. Solid and durable. Even if broken, will not fall, to further ensure the safety of passengers, ride without worry.

LED

LED

LED car lighting leads the new wave of energy-saving elevators

All cars are equipped with LED lighting devices, which respond to the national call for energy saving, safe, efficient, radiation-free and easy to maintain. It is a modern model of healthy and green living.

45%

40-45% 5-10dB(A)

The energy saving of environmental protection driving system is up to 45%

The elevator is innovatively driven by permanent magnet synchronous traction machine to improve the operation efficiency, with low starting current, small volume and low noise. Compared with the elevator driven by worm wheel and worm, the elevator saves energy by 40-45% and reduces noise by 5-10db (A).


IFE

Intelligent control system to save more energy


IFE responds to green environmental needs and creates green driven elevators for customers. For example, when no one is in the elevator, the intelligent control system enables lighting, ventilation and so on to automatically switch to standby mode.




BEC01-00

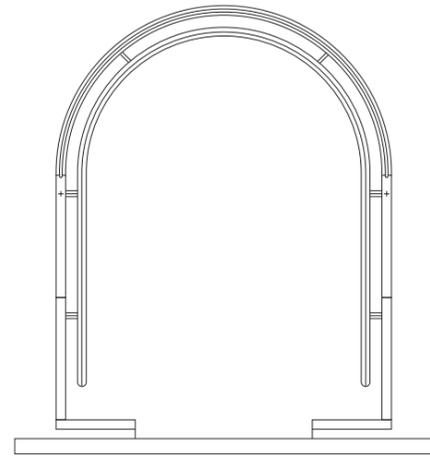

C50-00	+		
COP11-00			
CW98-00	+		
L01-00			
F03-00PVC			
CC01-00	+		
H20-00			

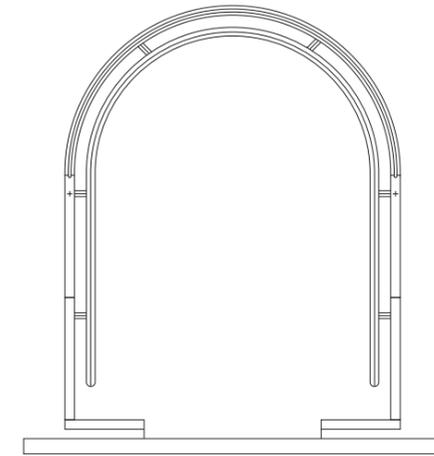


		+PC	+LED
COP11-00			
CW98-00	+		
L01-00			
F03-00PVC			
CC02-00			CCO U L01

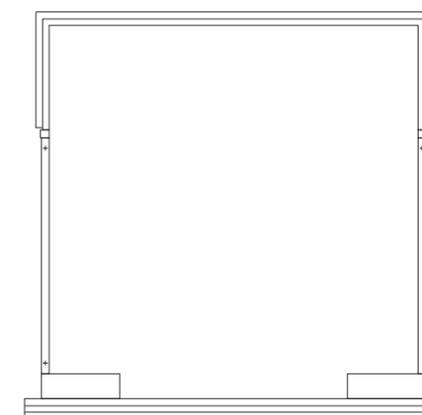

轿厢装饰规格

DECORATION CONFIGURATION

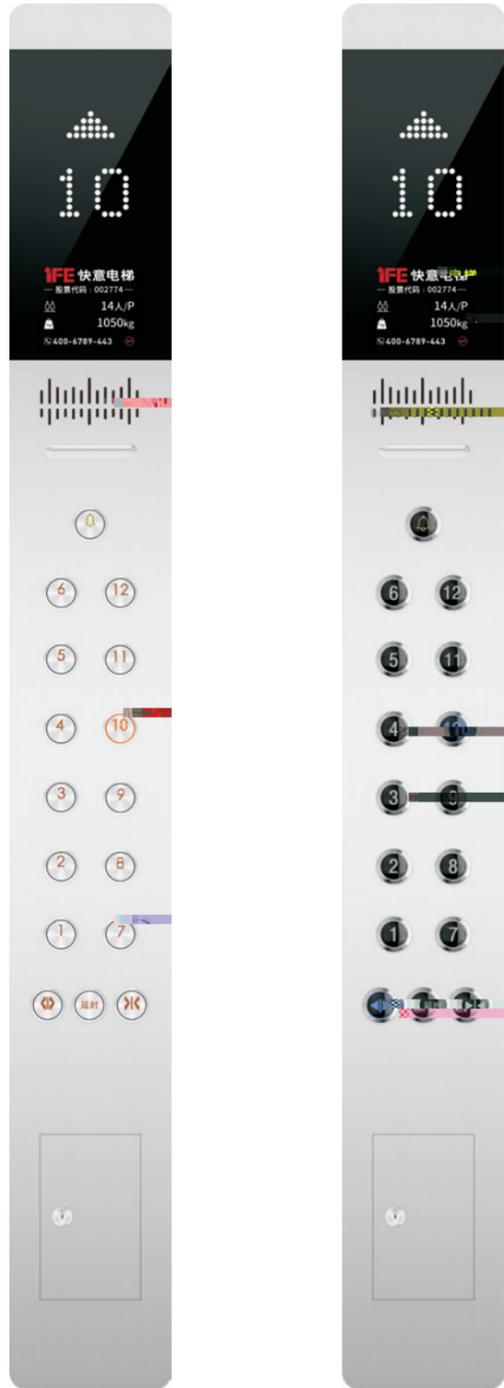

COP34-00()
:
:

COP34-00(Standard)
Panel: Hairline Stainless Steel
Display: White Dot-matrix



COP39-00()
:
:

COP39-00(Optional)
Panel: Hairline Stainless Steel
Display: White Dot-matrix


COP16-00()
:
:

COP16-00(Optional)
Panel: Hairline Stainless Steel
Display: Single Color LCD



HOP37-00()
:
:

HOP37-00(Standard)
Panel: Hairline Stainless Steel
Display: White Dot-matrix

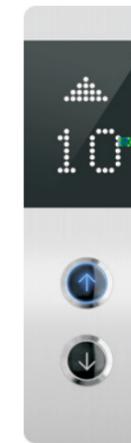

HOP41-00()
:
:

HOP41-00(Optional)
Panel: Hairline Stainless Steel
Display: White Dot-matrix



HOP38-00()
:
:

HOP38-00(Optional)
Panel: Hairline Stainless Steel
Display: White Segment Code

FLOORS




F01-01




F01-04




F01-05



F01-06



F01-07



F01-08



F02-03



F02-04

Full selective collection

DI erlock Door Int

Standard functions

21	RMG	Reversal movement Guard	
22	BG	Breaker guard	
23	CNRP	Contactore non-releasing protection	
24	FSSES	Speed limited switching in terminator	
25	BUFER	Buffer	
26	MSCP	Microcomputer self-check protection	
27	ALRF	Anti-locked rotor feature of motor	
28	FS	Fault storage	
29	SDCB	Star-delta contactor brake	0.1m/s
30	RALP	Rope Anti-loose Protection	
	E	Prox	2
35	DCD	Door circuit detection	

Pro

Special operating

36			
37	BS		
38			
39			
40			

Standard functions

Special operating

41	FFS	Firefighting floor setting
42	IO	Inspection operation
43	FCPS	Flexible car park set

Man-machine interface

44	DMPI	Dot-matrix(red) position indicator	LED
45	DMDI	Dot-matrix(red) direction indicator	LED
46	FMFS	Floor market flexible set	
47	AG	Arrival gong	

Emergency Function

48	AB	Alarm button
49	ECL	Emergency car lighting
50	FSI	Five station intercom 4x0.75mm ² (1800)
51	EFO	Emergency fire operation
52	FO	Fireman's operation
53	ER	Emergency rescue

Energy-saving function

54	PS	Parking service	üüb# A C T V C
55	ATOO	Automatic turn off/on	

Optional functions



01	DCO	Duplex Control Operation	
02	GCO	Group Control Operation 3 8	
03	IADO	In Advance Door Opening	
04	REL	Re-leveling	
05	ARD	Automatic rescue device	
06	EAC	Elevator Air Conditioner	
07	PF	Power Filter	EMC
08	PRD	Power regeneration device	
09	CMS	Community Monitoring System	
10			
11			
12			
13			
14			
15			
16	VBS		
17	BB		
18	ACS		
19	MOIH		
20	CCTVC		
21	ED		
22	TD	b# b#	
23	CSG		
24	DSEP		

BUILDINGEYE-JO


BUILDINGEYE-JO TECHNICAL SPECIFICATION

NO.	Specification	630(8 /p)	800(10 /p)	1050(14 /p)	1350(18 /p)	1600(21 /p)	
01	Rated capacity(kg)	630	800	1050	1350	1600	
02	Car shape						
03	Speed(m/s)	1.0 1.75	1.0 1.75	1.0 1.75	1.0 1.75	1.0 1.75	
04	Control system	Full collective operation					
05	Driving system	VVVF VVVF Driving					
06	Door control	VVVF VVVF Door control					
07	Traction machine	PM/Gearless					
08	Communication method	Serial Communication					
09	Car size(width*depth*height) (mm)	1100*1400*2350	1300*1550*2350	1300*1600*2350	1500*1600*2350	1500*1700*2350	
10	Door opening size(width*height) (mm)	800*2100	800*2100	900*2100	1100*2100	1100*2100	
11	Travel height(TR) (m)	1.0m/s	45	45	45	45	
		1.75m/s	75	75	75	75	
12	Hoistway size (width*height) (mm)	2200*1850	2200*2050	2400*1950	2400*2050	2600*2050	
13	Motor position	In the top of the shaft					
14	Overhead(OH) (mm)	1.0m/s	4700	4700	4700	4700	4700
		1.75m/s	4900	4900	4900	4900	4900
15	Pit depth(PD) (mm)	1.0m/s	1500	1700	1600	1500	1900
		1.75m/s	1650	1850	1750	1650	2050
16	Main power supply	1.0m/s	3*6mm ² +2*6mm ²			3*10mm ² +2*6mm ²	
		1.75m/s	3*6mm ² +2*6mm ²			3*10mm ² +2*6mm ²	

Note: The following overhead height is only applicable for the elevators that are not inside steel structure shaft and those elevators with car top is no more than 700mm away from the shaft wall.

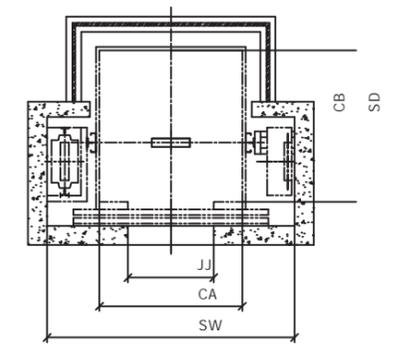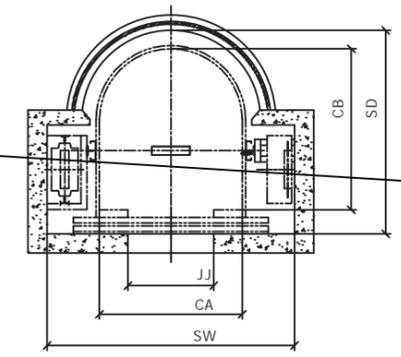

NO.	Specification	630(8 /p)	800(10 /p)	1050(14 /p)	1350(18 /p)	1600(21 /p)
01	kg Rated capacity(kg)	630	800	1050	1350	1600
02						
03	m/s Speed(m/s)	1111111				

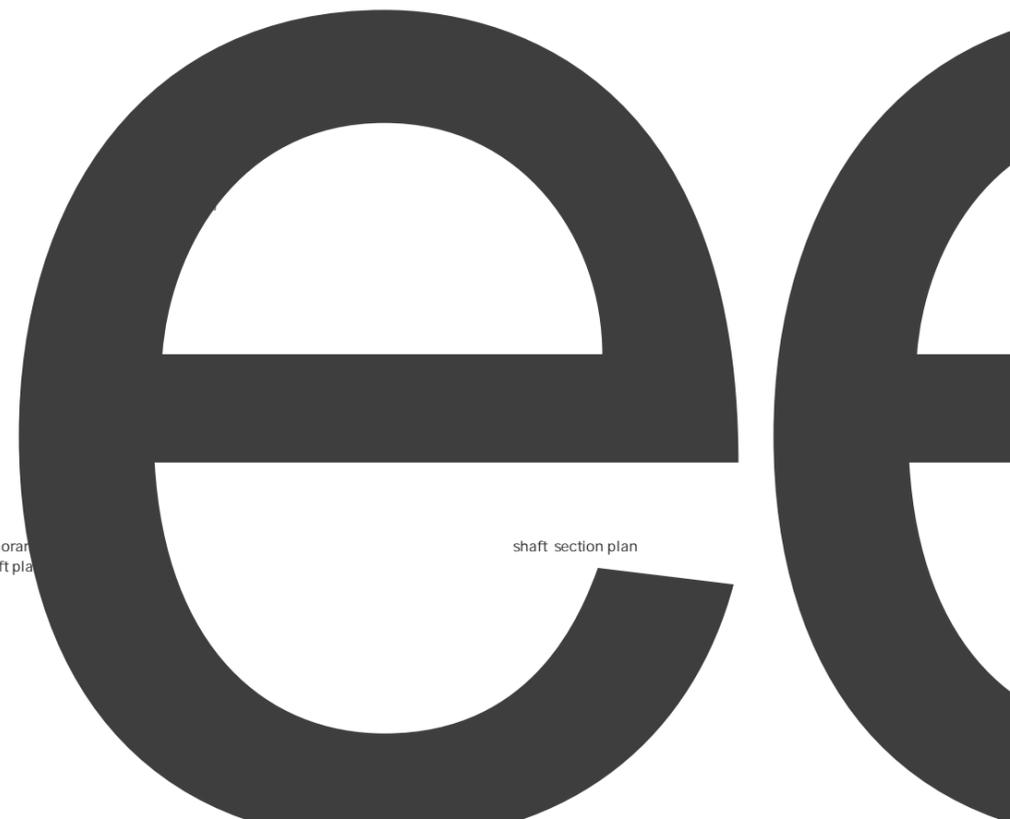

Diamond panoramic
shaft plan

shaft section plan